



HOSHIZAKI

LISTA DE PRECIOS 2025

COD-27062025



H·HOMEA
PREMIUM

HOMEA
www.homea.mx
Email: ventas@homea.mx
Whatsapp: (446)144.6318 Tel: (442)216.3552

MODELO	DESCRIPCIÓN	PRECIO
HS0229	DS Door Reversal Part	\$113
HS5061	Drain Pump	\$720
HS0182	Side Trim Kit	\$303
HS2133	2" Top Spacer Kit	\$216
H9320-51	Water Filtration - Single Configuration	\$451
AM50BAJ *	Máquina de hielos puerta de acero, Hielo Gourmet	\$4,370
AM50BAJDS *	Máquina de hielos panelable, Hielo Gourmet	\$4,533
AM50BAJAD *	Máquina de hielos puerta de acero medidas ADA, Hielo Gourmet	\$4,633
AM50BAJADDs *	Máquina de hielos panelable medidas ADA, Hielo Gourmet	\$4,761
C80BAJ *	Máquina de hielos puerta de acero, Hielo Cube	\$6,286
C80BAJDS *	Máquina de hielos panelable, Hielo Cube	\$6,469
C80BAJAD *	Máquina de hielos puerta de acero medidas ADA, Hielos Cube	\$6,301
C80BAJADDs *	Máquina de hielos panelable medidas ADA, Hielo Cube	\$6,606
AM50BAK	Maquina hielos acero (sustituye AM50BAJ)	\$4,370
AM50BAKDS	Maquina hielos panelable (sustituye AM50BAJDS)	\$4,533
AM50BAKAD	Maquina hielos acero ADA (sustituye AM50BAJAD)	\$4,633
AM50BAKADDs	Maquina hielos panelable ADA (sustituye AM50BAJADDs)	\$4,761
C80BAK	Maquina hielos acero (sustituye C80BAJ)	\$6,286
C80BAKDS	Maquina hielos panelable (sustituye C80BAJDS)	\$6,469
C80BAKAD	Maquina hielos acero ADA (sustituye C80BAJAD)	\$6,301
C80BAKADDs	Maquina hielos panelable ADA (sustituye C80BAJADDs)	\$6,606
IM200BAC	ELF Contained square cuber with built-in storage bin	\$8,259
IM50BAAQ	Sphere cube icemaker, air-cooled, built In storage bin	\$10,475
HR24C	Under counter refrigerator	\$3,073
KM81BAJ	Self-contained cuber with built-in storage bin	\$4,917

***MODELOS HASTA AGOTAR EXISTENCIAS**



**AM50BAJ(AD)DS *MODELOS HASTA AGOTAR EXISTENCIAS****SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN****W x D x H**AM50BAJ / AM50BAJDS
14⁷/₈" x 22⁵/₈" x 33¹/₂"AM50BAJAD / AM50BAJADS
14⁷/₈" x 22⁵/₈" x 33¹/₂"

(AD) - ADA Compliant



(DS) - Customized Cabinet Door System

AM50BAJ
Air Cooled (Shown)AM50BAJAD
Air Cooled
ADA Compliant UnitAM50BAJDS* (Shown)
with Custom CabinetryAM50BAJADS*
Air Cooled
ADA Compliant Unit
Customer responsible for providing cabinetry*Features**


- UL approved for outdoor use
- Undercounter design
- Drain pump option available
- Up to 55 lbs. of ice production per 24 hrs.
- Fewer moving parts for longer life.
- Power switch accessible without panel removal.
- Less than 34 inches tall (AM-50BAJ, AM-50BAJ-DS).
- Less than 32 inches tall; ADA Compliant (AM-50BAJ-AD, AM-50BAJ-ADS).
- Up to 22 lbs. of built-in storage capacity.
- Easily disassembled water circuit for easy cleaning.
- Front in and out airflow
- Equipped with 6 ft. Cord with NEMA 5-15 Plug.
- R-134a Refrigerant.

Warranty:

2 Year Parts & Labor on entire machine.
1 Year Parts & Labor on HS-5061 Drain Pump Assembly.
Valid in United States, Canada, Puerto Rico and U.S. Territories.
Contact factory for warranty in other countries.

MODELO	DESCRIPCIÓN	PRECIO
AM50BAJ *Hasta agotar existencias	Máquina de hielos, puerta de acero, Hielo Gourmet	\$4,370
AM50BAJDS *Hasta agotar existencias	Máquina de hielos, panelable, Hielo Gourmet	\$4,533
AM50BAJAD *Hasta agotar existencias	Máquina de hielos, puerta de acero, medidas ADA, Hielo Gourmet	\$4,633
AM50BAJADS *Hasta agotar existencias	Máquina de hielos, panelable, medidas ADA, Hielo Gourmet	\$4,761

			ICE PRODUCTION		WATER USAGE		ELECTRICAL						
Condenser	Model	Air / Water Temp Lbs. per 24 hour s 70°/ 50°F 90°/ 70°F			Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Max. Fuse Sz or HACR Circuit Bkr	Amperage	Voltage	Heat Rejection BTU/hr.	Refrigeran t Charge Amount	Net / Ship Weight (lbs.)
	Air	AM50BAJ(DS)	51	35	71.0	N/A	17.0	15A	3.8A	115V/60/1	1,900	4.2oz	88 / 97
	Air	AM50BAJAD(DS)	55	34	63.9	N/A	16.8	15A	3.8A	115V/60/1	1,900	4.2oz	88 / 99

AM Cube Dimensions***approximate size in inches, image not to scale***Operating Limits**

- Ambient Temp Range 45-100°F
- Water Temp Range 45-95°F
- Water Pressure 7-113 PSIG
- Voltage Range 104-127V

Location

- Allow 15" (38cm) at front and enough space at rear for water supply and drain connections.
- Location must provide a firm and level foundation.
- Do not place near ovens, grills or other high heat producing equipment

Parts

- -DS Door Reversal Part - HS-0229
Optional Kit required for (-DS) models.
- Side trim kit available.
- Accessory - HS-5061 Drain Pump Assembly.
- Water filter - H9320-51


Plumbing

- Ice maker Water Supply Line: Minimum 1/4" Nominal ID Cooper Water Tubing or Equivalent
- Ice maker Drain Line: Minimum 1/2" Nominal ID Hard Pipe or Equivalent.


AM50BAJ(AD)DS

SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

FRONT VIEW

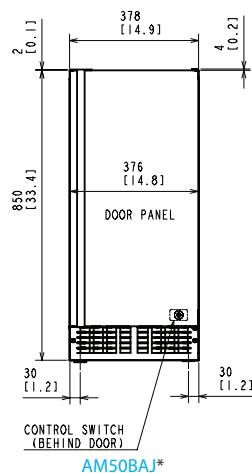


* -AD models have height of 31.5"

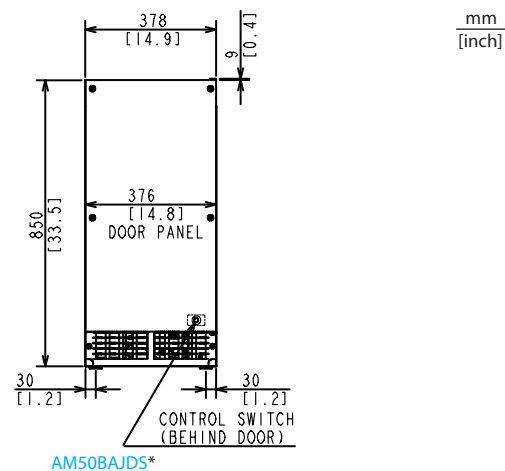


mm
[inch]


REAR VIEW

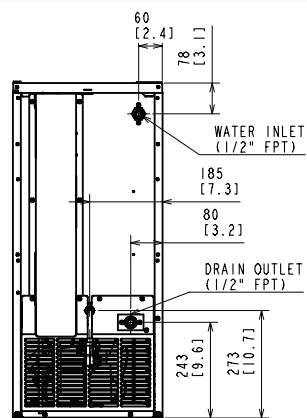


* -AD models have height of 31.5"

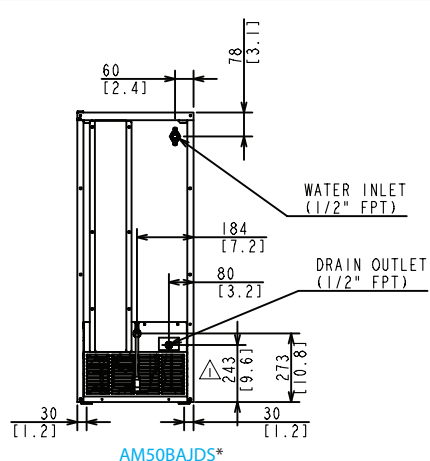

SIDE VIEW

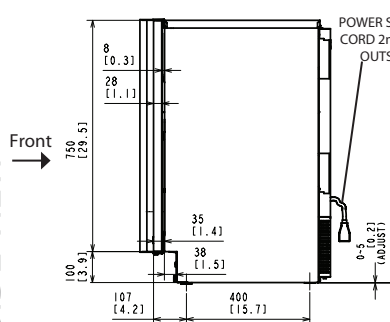



AM50BAJ*

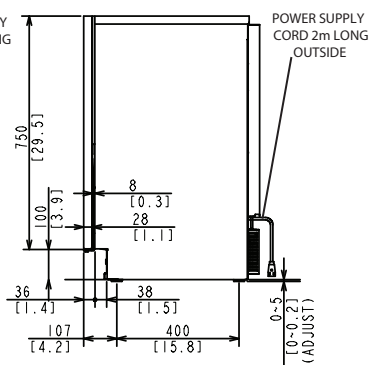

AM50BAJDS*

* -AD models have height of 31.5"

TOP VIEW

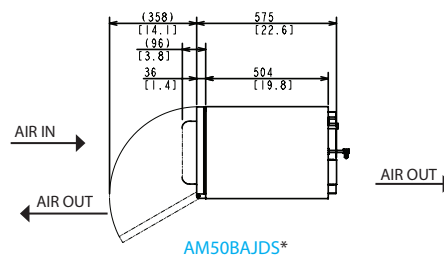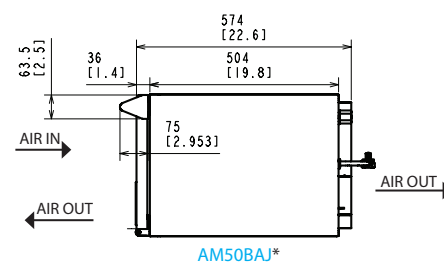

**AM-50BAK-(AD)DS**

SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

W x D x H

AM-50BAK / AM-50BAK-DS

14 7/8" x 22 5/8" x 33 1/2"

Shipping Dimensions 20 3/4" x 30 1/2" x 40"

AM-50BAK-AD / AM-50BAK-ADDS

14 7/8" x 22 5/8" x 31 1/2"

Shipping Dimensions 20 3/4" x 30 1/2" x 38"

*not including handle



AM-50BAK
Air-Cooled
(Shown)
AM-50BAK-AD
Air-Cooled
ADA Compliant Unit



AM-50BAK-DS*
(Shown)
with Custom Cabinetry
AM-50BAK-ADDS*
Air-Cooled
ADA Compliant Unit
**Customer responsible for providing cabinetry*

**Features**

- Full length stainless steel door handle
- UL approved for outdoor use
- Undercounter design
- Drain pump option available
- Environmentally friendly R290 hydrocarbon refrigerant

- Up to 54 lbs. of ice production per 24 hours
- Fewer moving parts for longer life
- Power switch accessible without panel removal
- Less than 34 inches tall
- Less than 32 inches tall; ADA (AM-50BAK-AD, AM-50BAK-ADDS)
- Up to 27 lbs. of built-in storage capacity
- Easily disassembled water circuit for easy cleaning
- Front in and out airflow
- Equipped with 6 ft. Cord with NEMA 5-15 Plug

Warranty:


2 Year Parts & Labor on entire machine.

1 Year Parts & Labor on HS-5061 Drain Pump Assembly.

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

MODELO	DESCRIPCIÓN	PRECIO
AM50BAK	Maquina hielos acero (sustituye AM50BAJ)	\$4,370
AM50BAKDS	Maquina hielos panelable (sustituye AM50BAJDS)	\$4,533
AM50BAKAD	Maquina hielos acero ADA (sustituye AM50BAJAD)	\$4,633
AM50BAKADDS	Maquina hielos panelable ADA (sustituye AM50BAJADDS)	\$4,761

Condenser	Model	ICE PRODUCTION		WATER USAGE		ELECTRICAL				Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
		Air / Water Temp Lbs. per 24 hours	70° / 50°F	90° / 70°F	Potable Gal. per 100 lbs.	Condenser Gal. per 100 lbs.	kWh Used per 100 lbs.	Min. Circuit/Max. Fuse Size	Amperage	Voltage		
Air	AM-50BAK(-DS)	54	35	65.0	N/A	9.0	15A	2.0A	115V/60/1	1,400	2.3oz	103/112
Air	AM-50BAK-AD(-DS)	54	35	65.0	N/A	9.0	15A	2.0A	115V/60/1	1,400	2.3oz	103/112

AM Cube Dimensions*

* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 95°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104-127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Location

- Allow 15" (38 cm) at front and enough space at rear for water supply and drain connections.
- Location must provide a firm and level foundation.
- Do not place near ovens, grills or other high heat producing equipment.

Parts

- Side trim kit available - HS-0182
- Accessory - HS-5061 Drain Pump Assembly
- Water filter - H9320-51

Plumbing


- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 1/2" Nominal ID Hard Pipe or Equivalent

Hoshizaki reserves the right to change specifications without notice.


AM-50BAK-(AD)DS

SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN


FRONT VIEW

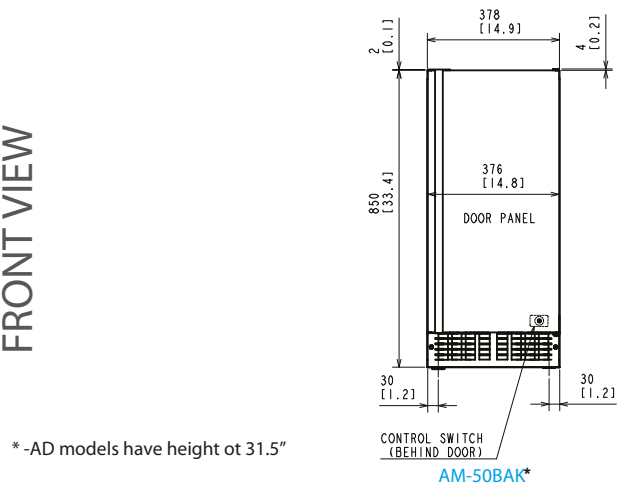


* -AD models have height of 31.5"

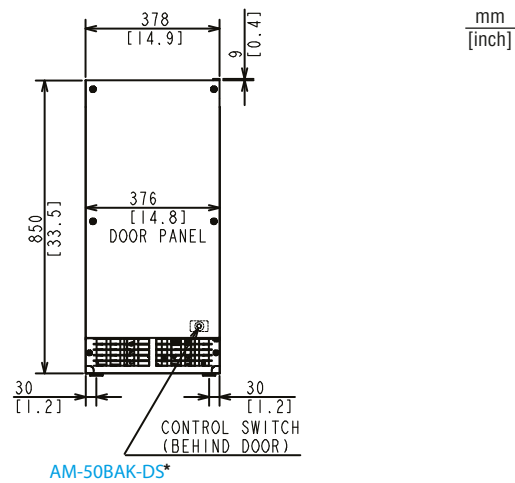


REAR VIEW

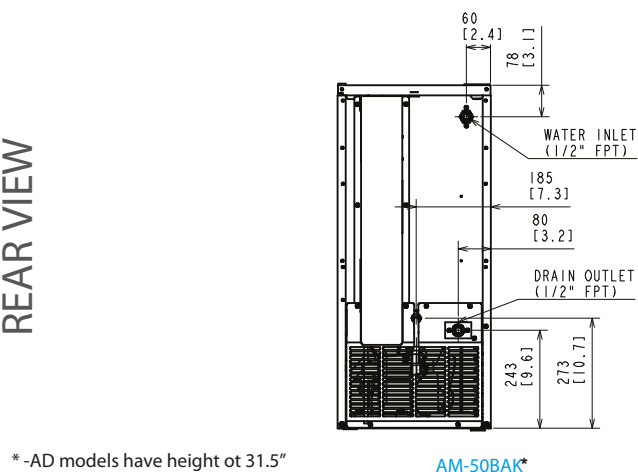


* -AD models have height of 31.5"

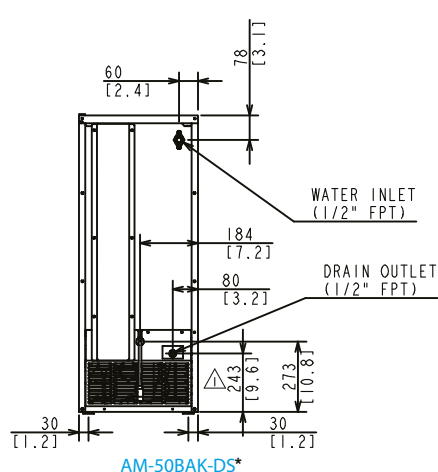


SIDE VIEW

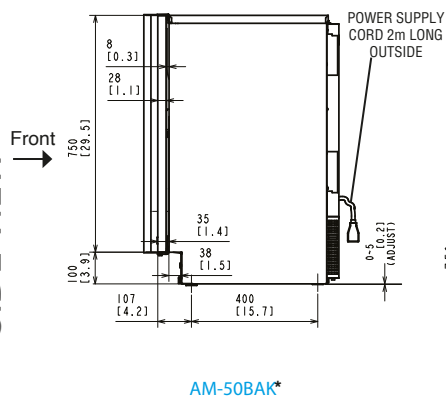

* -AD models have height of 31.5"

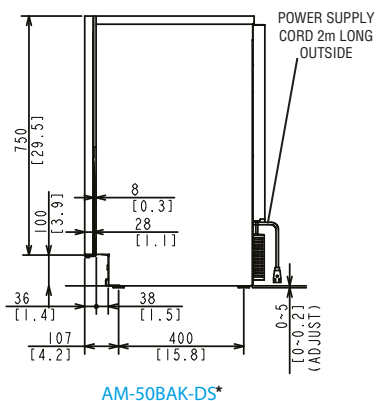

TOP VIEW

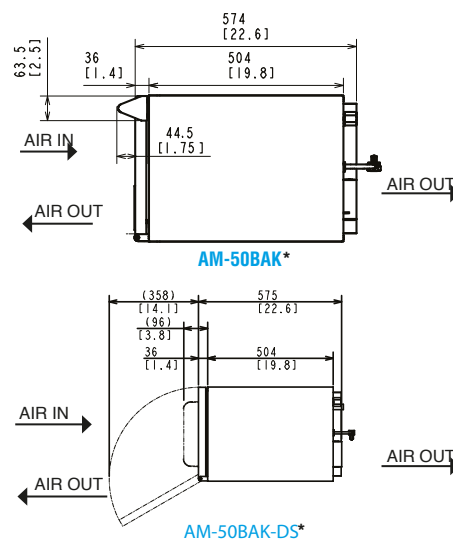



C80BAJ(AD)DS *MODELOS HASTA AGOTAR EXISTENCIAS


SELF-CONTAINED CUBELET ICE MACHINE WITH BUILT-IN STORAGE BIN

W x D x H C80BAJ / C80BAJDS 147⁷/₈" x 22⁵/₈" x 33¹/₂" Shipping Dimensions 30¹/₂" x 20³/₄" x 40" C80BAJAD / C80BAJADS 147⁷/₈" x 22⁵/₈" x 31¹/₂" Shipping Dimensions 30¹/₂" x 20³/₄" x 38"	(AD) - ADA Compliant  (DS) - Customized Cabinet Door System	Features • Full length stainless steel door handle • UL approved for outdoor use • Undercounter design
 C80BAJ Air Cooled (Shown) C80BAJAD Air Cooled ADA Compliant Unit  C80BAJDS* (Shown) with Custom Cabinetry C80BAJADS* Air Cooled ADA Compliant Unit <i>*Customer responsible for providing cabinetry</i>       		• Up to 80 lbs. of ice production per 24 hrs. • Up to 22 lbs. of built-in storage capacity. • Power switch accessible without panel removal. • Less than 34 inches tall (C80BAJ, C80BAJDS). • Less than 32 inches tall; ADA Compliant (C80BAJAD, C80BAJADS). • Easily disassembled water circuit for easy cleaning. • Front in and out airflow • Equipped with 6 ft. Cord with NEMA 5-15 Plug. • R-134a Refrigerant. Warranty: 2 Year Parts & Labor on entire machine. 1 Year Parts & Labor on HS-5061 Drain Pump Assembly. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

MODELO	DESCRIPCIÓN	PRECIO
C80BAJ *Hasta agotar existencias	Máquina de hielos, puerta de acero, Hielo Cube	\$6,286
C80BAJDS *Hasta agotar existencias	Máquina de hielos, panelable, Hielo Cube	\$6,469
C80BAJAD *Hasta agotar existencias	Máquina de hielos, puerta de acero, medidas ADA, Hielo Cube	\$6,301
C80BAJADS *Hasta agotar existencias	Máquina de hielos, panelable, medidas ADA, Hielo Cube	\$6,606

			ICE PRODUCTION		WATER USAGE		ELECTRICAL						
Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/ 50°F 90°/ 70°F	Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Max. Fuse Sz or HACR Circuit Bkr	Amperage	Voltage	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)		
Air	C80BAJ(DS)	80 45	12.0	N/A	17.3	15A	4.0A	115V/60/1	1,850	3.92 oz	118 / 130		
Air	C80BAJAD(DS)	80 45	12.0	N/A	17.3	15A	4.0A	115V/60/1	1,850	3.92 oz	118 / 130		

Mini Cubelet Dimensions*



**approximate size in inches, image not to scale*

Operating Limits

- Ambient Temp Range 45-100°F
- Water Temp Range 45-95°F
- Water Pressure 7-113 PSIG
- Voltage Range 104-127V

Location

- Allow enough clearance at rear for water and drain connections with 15" (38cm) clearance in the front.
- Location must provide a firm and level foundation.
- Do not place near ovens, grills or other high heat producing equipment

Parts

- Optional Side Trim Kit: HS-0182
- Optional Top Trim Kit: HS-2133
- Optional Drain Pump Assembly: HS-5061

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Cooper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 1/2" Nominal ID Hard Pipe or Equivalent.

Water Filter


Please refer to water filter spec sheet for recommended configurations.




C80BAJ(AD)DS

SELF-CONTAINED CUBELET ICE MACHINE WITH BUILT-IN STORAGE BIN

FRONT VIEW

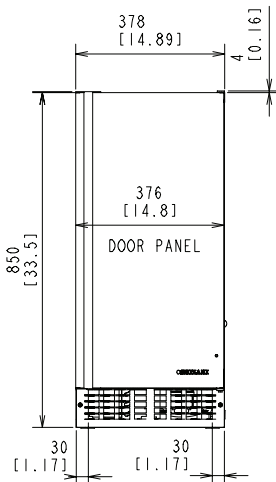

C80BAJ*

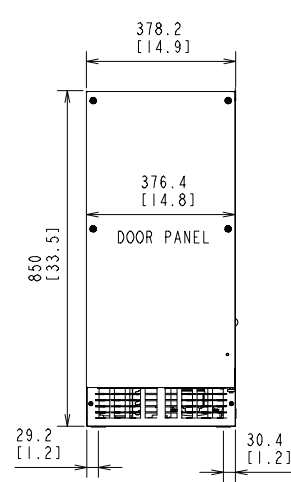


C80BAJDS*

mm
[inch]

* AD models have height ot 31.5"


REAR VIEW

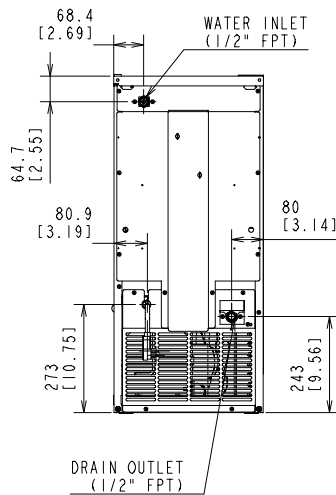

C80BAJ(DS)*

* AD models have height ot 31.5"


SIDE VIEW

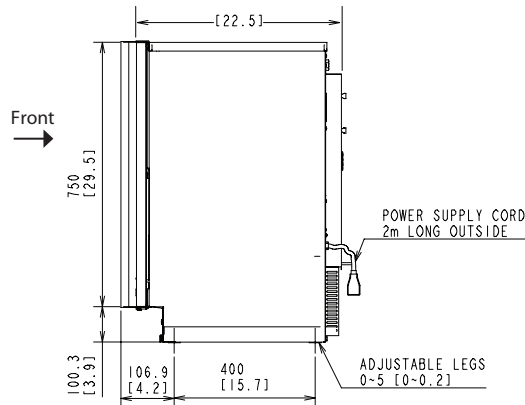

C80BAJ*

* AD models have height ot 31.5"

TOP VIEW

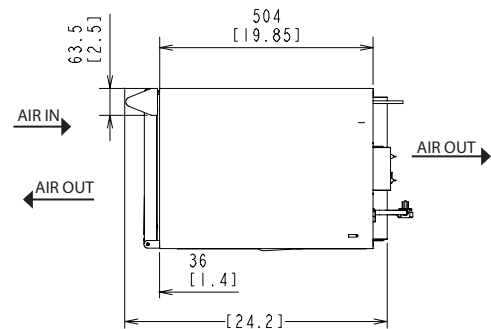

C80BAJ*

**C80BAK(AD)DS****SELF-CONTAINED CUBELET ICE MACHINE WITH BUILT-IN STORAGE BIN**

W x D x H C80BAK / C80BAKDS 14 ⁷ / ₈ " x 22 ⁵ / ₈ " x 33 ¹ / ₂ " Shipping Dimensions 20 ³ / ₄ " x 30 ¹ / ₂ " x 40"	(AD) - ADA Compliant (DS) - Customized Cabinet Door System	Features • Full length stainless steel door handle • UL approved for outdoor use • Undercounter design • Enviromentally friendly R290 hydrocarbon refrigerant • Energy Star Qualified • Up to 92 lbs. of ice production per 24 hrs. • Up to 27 lbs. of built-in storage capacity. • Power switch accessible without panel removal. • Less than 34 inches tall (C80BAK, C80BAKDS). • Less than 32 inches tall; ADA Compliant (C80BAKAD, C80BAKADDS). • Easily disassembled water circuit for easy cleaning. • Front in and out airflow • Equipped with 6 ft. Cord with NEMA 5-15 Plug. • R-134a Refrigerant.
C80BAKAD / C80BAKADDS 14 ⁷ / ₈ " x 22 ⁵ / ₈ " x 31 ¹ / ₂ " Shipping Dimensions 20 ³ / ₄ " x 30 ¹ / ₂ " x 38"		

***C-80BAK**
 Air-Cooled
(Shown)
***C-80BAK-AD**
 Air-Cooled
 ADA Compliant Unit

C-80BAK-DS
 with Custom Cabinetry
(Shown)
C-80BAK-ADDS
 Air-Cooled
 ADA Compliant Unit
**Customer responsible for providing cabinetry*


Warranty:

2 Year Parts & Labor on entire machine.
 1 Year Parts & Labor on HS-5061 Drain Pump Assembly.
 Valid in United States, Canada, Puerto Rico and U.S. Territories.
 Contact factory for warranty in other contries.

MODELO	DESCRIPCIÓN	PRECIO
C80BAK	Maquina hielos acero (sustituye C80BAJ)	\$6,286
C80BAKDS	Maquina hielos panelable (sustituye C80BAJDS)	\$6,469
C80BAKAD	Maquina hielos acero ADA (sustituye C80BAJAD)	\$6,301
C80BAKADDS	Maquina hielos panelable ADA (sustituye C80BAJADDS)	\$6,606

Condenser	Model	ICE PRODUCTION		WATER USAGE		ELECTRICAL				Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
		Air / Water Temp Lbs. per 24 hours 70° / 50°F	90° / 70°F	Potable Gal. per 100 lbs. 90° / 70°F	Condenser Gal. per 100 lbs. 90° / 70°F	kWh Used per 100 lbs. 90° / 70°F	Min. Circuit/ Max. Fuse Size	Amperage	Voltage			
Air	C-80BAK(-DS)*	92	65	12.0	N/A	8.5	15A	2.8A	115V/60/1	1,400	1.9 oz	125/134
Air	C-80BAK-AD(-DS)*	92	65	12.0	N/A	8.5	15A	2.8A	115V/60/1	1,400	1.9 oz	125/134

Power cord included

Mini Cubelet Dimensions*

*approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104-127V
- If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Service

- Allow enough clearance at rear for water and drain connections with 15" (38 cm) clearance in the front.
- Location must provide a firm and level foundation.
- Do not place near ovens, grills or other high heat producing equipment.

Parts

- Optional Side Trim Kit: HS-0182
- Optional Drain Pump Assembly: HS-5061
- Water filter: H9320-51

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 1/2" Nominal ID Hard Pipe or Equivalent



Water Filter

Please refer to water filter spec sheet for recommended configurations.



C80BAK(AD)DS
SELF-CONTAINED CUBELET ICE MACHINE WITH BUILT-IN STORAGE BIN


FRONT VIEW

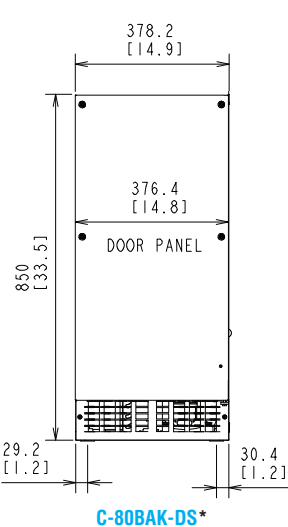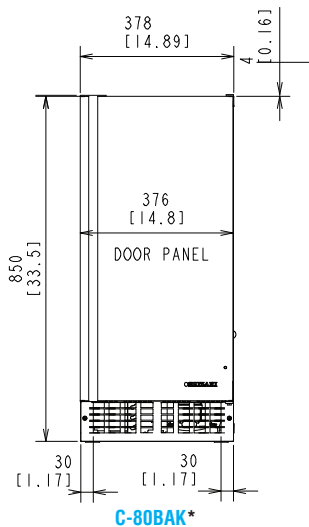

mm
[inch]


* -AD models have height of 31.5"

REAR VIEW

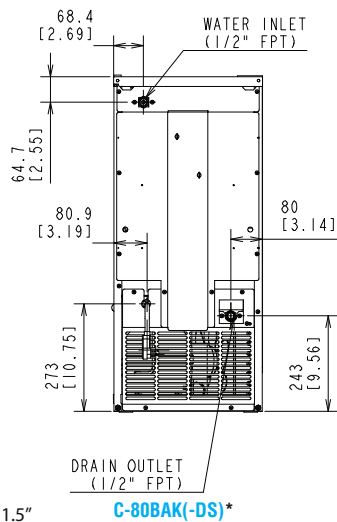


* -AD models have height of 31.5"

SIDE VIEW

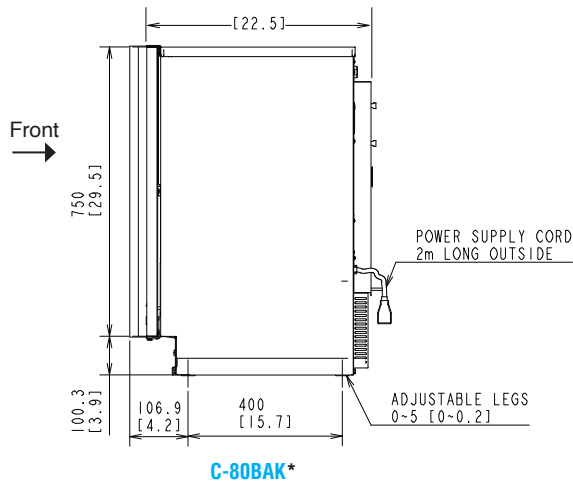

* -AD models have height of 31.5"

TOP VIEW

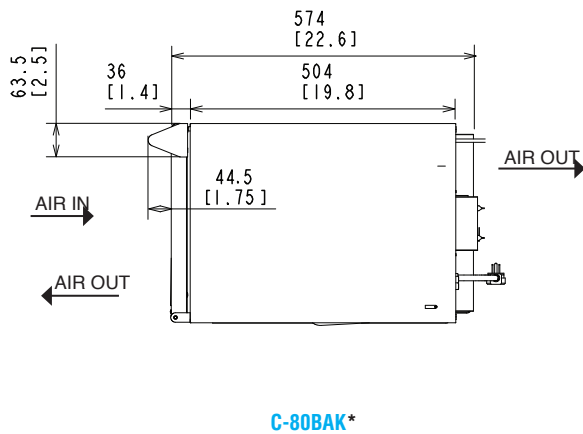



IM200BAC

SELF-CONTAINED SQUARE CUBER WITH BUILT-IN STORAGE BIN

W x D x H
39 1/2" x 23 5/8" x 33 1/2"*
*including 6" legs

IM200BAC
Air-Cooled



Features

- ▶ Large, individual, clear square cubes
- ▶ Self-contained with built-in storage bin
- ▶ Each cube is made individually by a dedicated jet spray

- Up to 188 lbs. of ice production per 24 hours
- Built-in storage capacity 75 lbs.*
- EverCheck™ alert system 
- Durable stainless steel exterior
- Removable air filter
- Ice scoop included
- Five 6" adjustable legs are standard
- 6' power cord with NEMA 5-15P plug
- R-404A Refrigerant

Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil.
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.


Shipping: (LxWxH) 43 1/4" x 26 3/4" x 34 1/8" Volume: 22.85ft³

MODELO	DESCRIPCIÓN	PRECIO
IM200BAC	Self contained square cuber with built-in storage bin	\$8,259

Condenser	Model	ICE PRODUCTION		WATER USAGE		ELECTRICAL			Storage Capacity	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
		Air / Water Temp Lbs. per 24 hours 70°/ 50°F	90°/ 70°F	Potable Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Max. Fuse Size or HACR Circuit Breaker	Amperage	Voltage				
Air-Cooled	IM200BAC	188	150	22.5	8.4	15A	7.5A	115V/60/1	2.5 ft ³ /75lbs.*	3,420	10.6oz	175 / 212

*Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

IM Cube Dimensions*



* approximate size; image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104 - 127V

Service

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter.

Water Filter

Please refer to water filter specification sheet for recommendations.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Clearance


- Allow 6" (15 cm) clearance on right side and 2" (5 cm) on rear. Allow 2" (5 cm) on left side and 0" on top or 5/8" (15 mm) on left side and 2" (5 cm) on top for proper air circulation and ease of maintenance/service.
- Do not place more than 33 lbs. on the top panel.

Hoshizaki reserves the right to change specifications without notice.


IM200BAC

SELF-CONTAINED CUBELET ICE MACHINE WITH BUILT-IN STORAGE BIN


FRONT VIEW

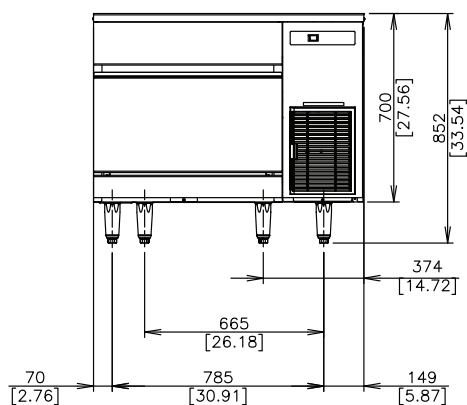


SIDE VIEW

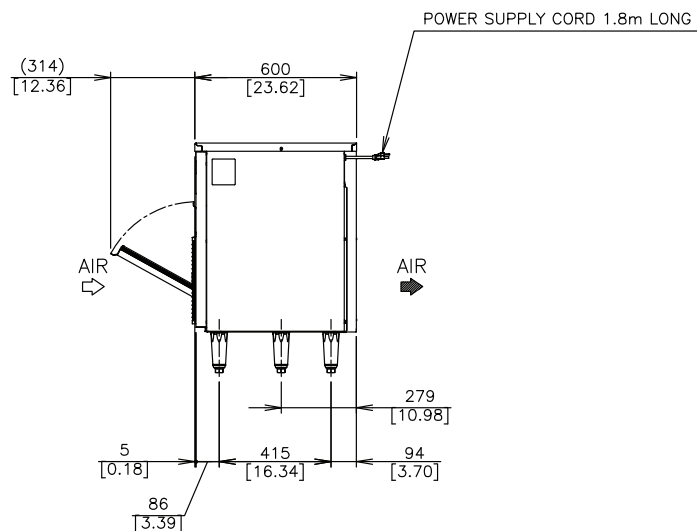

BOTTOM VIEW

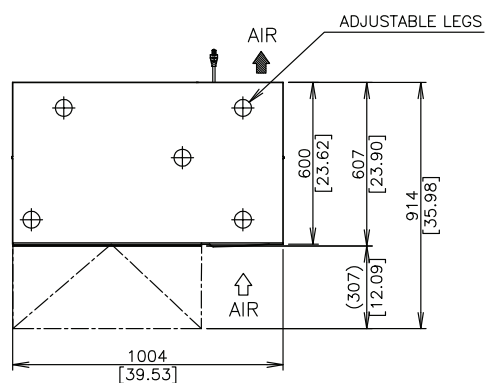

REAR VIEW

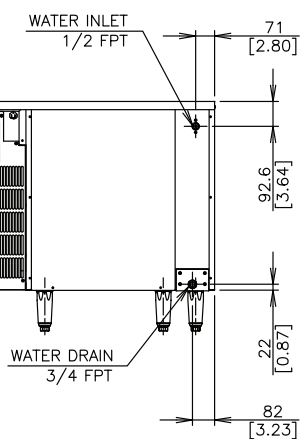



IM50BAAQ

SPHERE ICE MACHINE BUILT-IN STORAGE BIN

W x D x H
24^{3/4"} x 20^{3/4"} x 39^{1/2"}*
*including legs



Diameter 1.8"
Weight 1.6 oz.



IM50BAAQ



Features

- The only machine on the market to make sphere ice. Spheres are 1.8" in diameter, clear and solid.
- Cubes have superior chilling ability and beautiful appearance.
- Small footprint can easily fit under bar counter.

- Up to 50 lbs. (500 spheres) of ice production per 24 hours
- Built-in storage bin with 36 lb. capacity
- Durable stainless steel exterior
- Easy to clean air filter
- Foam injected polyurethane for insulation (HFC free)
- Closed water circuit offers the ultimate contamination protection
- Ice scoop included
- 6.5' power cord with NEMA 5-15P plug

Warranty:

3 Year Parts & Labor on entire machine.
5 Year Parts on Compressor, air-cooled condenser coil.
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping: (LxWxH) 30" x 24.6" X 38.4"


Volume: 16.4ft³

MODELO	DESCRIPCIÓN	PRECIO
IM50BAAQ	Sphere ice machine built-in storage bin	\$10,475

Condenser	Model	ICE PRODUCTION		WATER USAGE		kWh Used per 100 lbs. 90°/ 70°F	Max. Fuse Size or HACR Circuit Breaker	Amperage	Voltage	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
		Air / Water Temp Lbs. per 24 hours 70°/ 50°F	90°/ 70°F	Potable Gal. per 24 hrs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F							
Air	IM50BAAQ	50	45	69	N/A	15.7	15A	5.0A	115V/60/1	1500	R134a / 7.1oz	139 / 168

*Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

Sphere Ice Dimensions*



* approximate size; image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104 - 127V

Service

- Removable/cleanable air filter
- Panels easily removed and all components accessible for service.

Water Filter

Please refer to water filter speccation sheet for recommendations.

Plumbing

- Icemaker Water Supply Line: Minimum 1/2" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Clearance


- Minimum clearance: Allow 6" (15 cm) from Top and Rear. Allow 6" (15 cm) on left side and 0" on right side or 0" on left side and 6" (15 cm) on right side.

Hoshizaki reserves the right to change specifications without notice.


IM50BAAQ

SPHERE ICE MACHINE BUILT-IN STORAGE BIN

FRONT VIEW

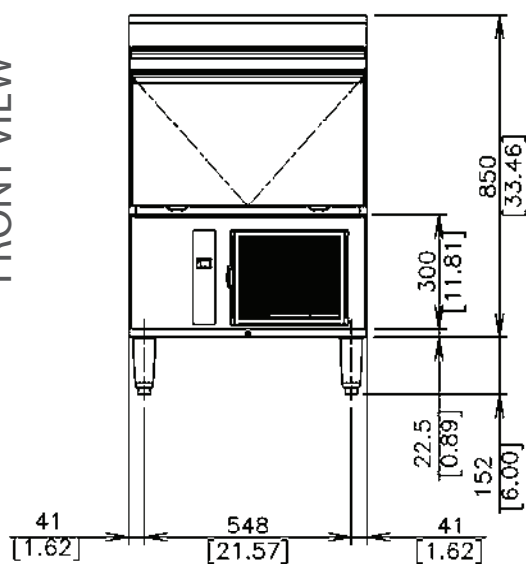


REAR VIEW

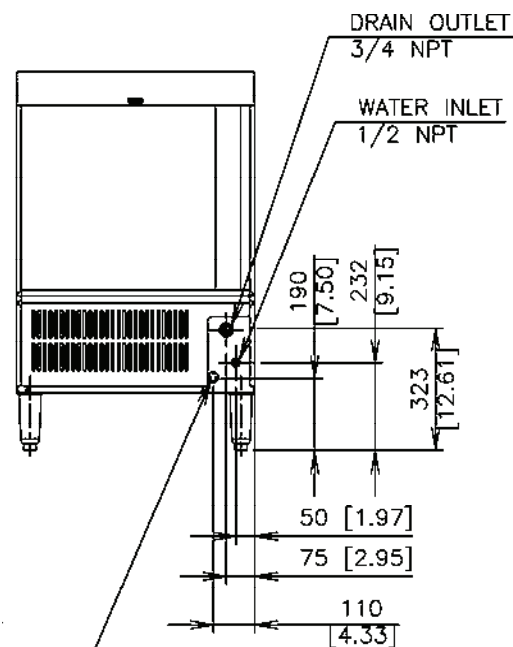


POWER SUPPLY CORD 2.0m[6.56 ft] LONG

SIDE VIEW

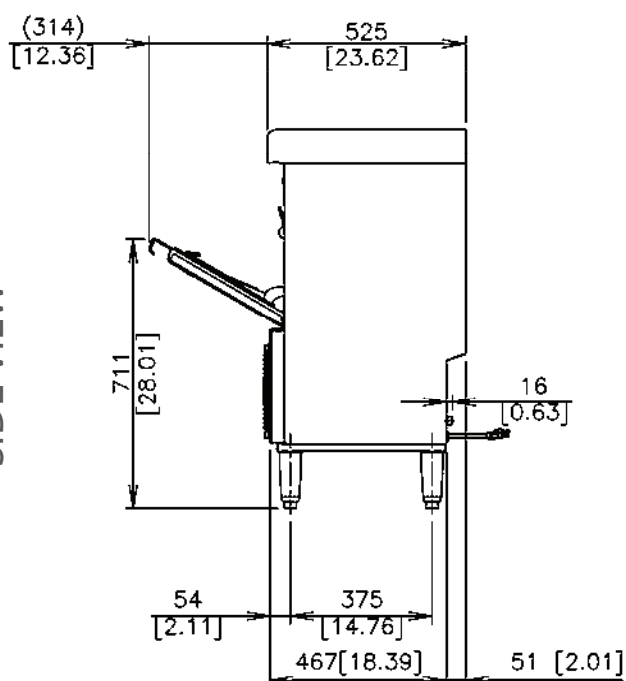

TOP VIEW

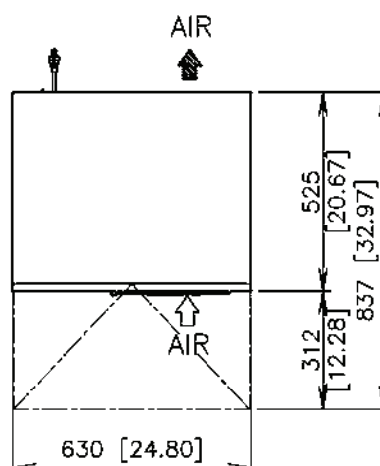

**HR24C****COMPACT UNDERCOUNTER REACH-IN REFRIGERATOR**W x D x H
23.4" x 24.7" x 31.5"ADA Compliant **Features**

- Stainless steel interior and exterior front, sides and top
- UL approved for outdoor use
- Interior LED lighting
- Stainless steel exterior door with aluminum interior comes standard with locks
- Field reversible door with full length tubular handle
- Magnetic door gasket is easily removable for cleaning
- Environmentally friendly insulation
- Electronic controls with LED Temperature Display and Audio/Visual Alarm
- High and low temperature alarms as well as "Door Open" alarm
- Automatic time-initiated defrost
- (3) Epoxy coated shelves standard
- 9 ft. cord and 5-15P NEMA plug
- Three year parts and labor warranty

Warranty:

3 Year Parts & Labor on entire machine.
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

MODELO	DESCRIPCIÓN	PRECIO
HR24C	Under counter refrigerator	\$3,073

Dimensions / Capacity

Interior Storage Capacity (CF) (AHAM)	One Section HR24C 3.87 ft ³
Overall Width x Depth (with handle)	23.4" x 26.5"
Height	31.5"
Depth with Door Open at 90°	46.7"
Adjustable Shelves	3
Shelf Dimensions (W x D)	(1) 18.5" x 17", (2) 18.5 x 12"
Crated Weight	115 lbs.
Crated Shipping Dimensions (WxDxH)	26.8" x 24" x 36.6"

Electrical / Refrigeration


Voltage	One Section HR24C 115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P 
Voltage Range	115-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	34° to 52°F
Amperage	1.1
Energy Consumption (kWh/day) @ASHRAE	0.64
Heat Rejection (BTU/Hr.) @NSF	648
Approx. Nominal Compres. BTU/HR (HP)	501 (1/8HP)
Refrigerant (charge amount, oz.)	R600a (0.9 oz.)

Hoshizaki reserves the right to change specifications without notice.




HR24C
COMPACT UNDERCOUNTER REACH-IN REFRIGERATOR


FRONT VIEW

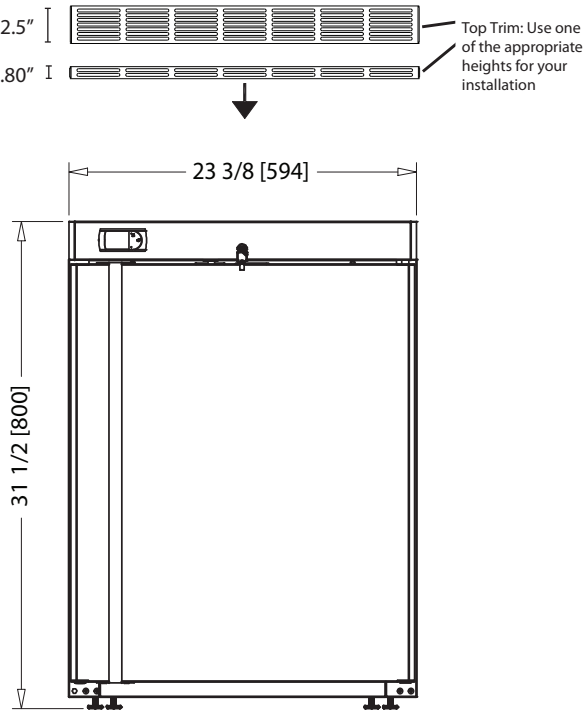

SIDE VIEW

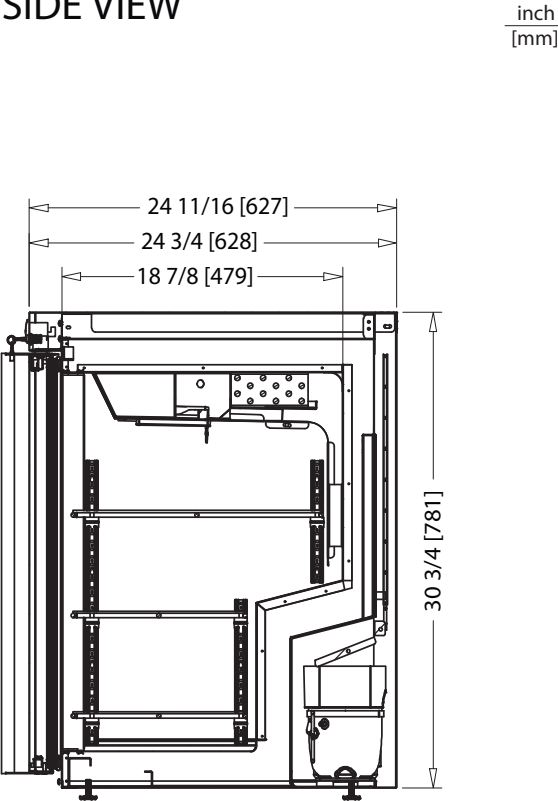

PLAN VIEW

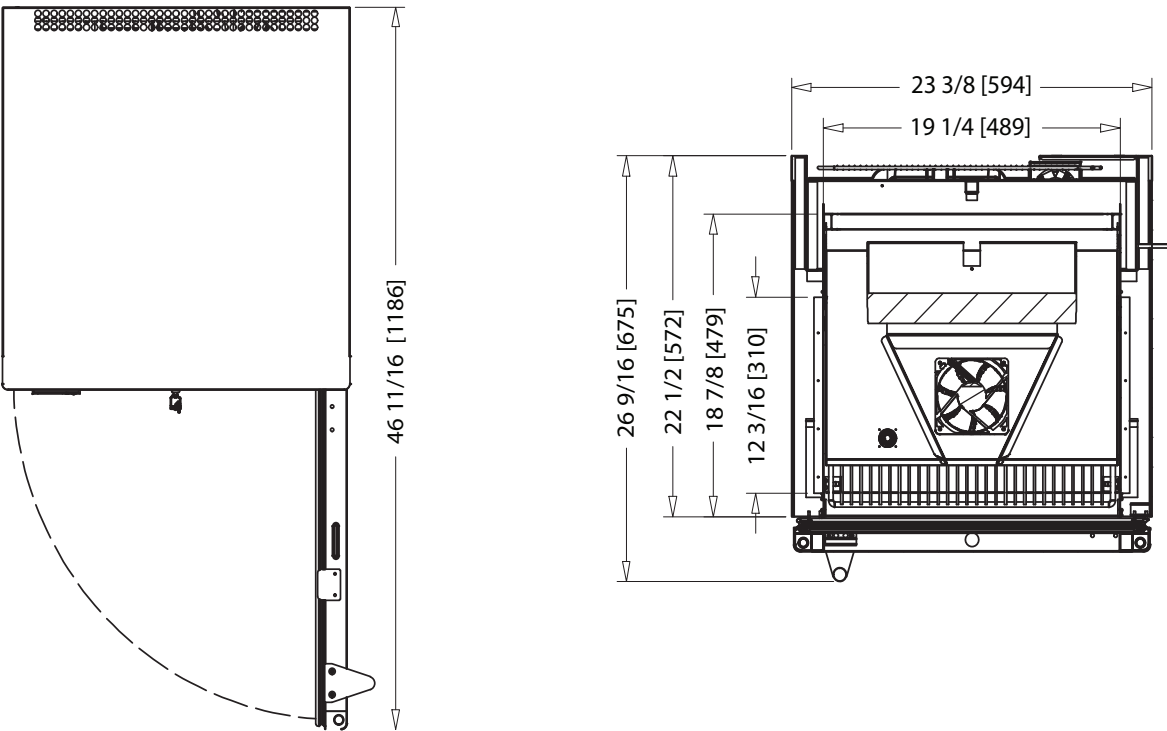

**KM-81 BAJ**

SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

W x D x H
17.75" x 24" x 39"*

*including 6" legs

ADA Compliant

**KMEdge
DESIGN****KM-81BAJ ★**
Air-Cooled**Features**

- Individual crescent cube
- Stainless steel evaporator
- CycleSaver™ design

KM-81BAJ

- Up to 78 lbs. of ice production per 24 hrs
- Built-in storage capacity of 1.3ft

Warranty:


3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator. 5 Year Parts on Compressor; air-cooled condenser coil. 1 Year - HS-5061 Drain Pump Assembly - Parts & Labor. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

MODELO	DESCRIPCIÓN	PRECIO
KM81BAJ	Self-contained cuber with built-in storage bin	\$4,917

Condenser	Model	ICE PRODUCTION		WATER USAGE		ELECTRICAL			Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
		Air / Water Temp Lbs. per 24 hours 70°/ 50°F 90°/ 70°F	Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Min. Circuit Amp. - Max Fuse/Breaker	Amperage	Voltage			
Air-Cooled	KM-81BAJ	78 52	19.5	N/A	8.45	15A	3.5A	115V/60/1	1,350	7.1 oz.	92 / 125
Air-Cooled	KM-116BAJ	125 100	20.0	N/A	8.10	15A	5.5A	115V/60/1	2,100	7.8 oz.	111 / 146

KM-81BAJ Shipping: (LxWxH) 27" x 21" X 39" Volume: 12.80ft³

KM-116BAJ Shipping: (LxWxH) 27" x 27" X 39" Volume: 16.45ft³

KMEdge Cube Dimensions*

* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104 - 127V

Service

- Allow enough space at rear for water supply and drain connections, at least 12" (30 cm) clearance at front and at least 0.6" (15 mm) clearance at top for maintenance.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Water Filter

Please refer to water filter spec sheet for recommended configurations.


Hoshizaki reserves the right to change specifications without notice.




KM-81 BAJ
SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN

inch
[mm]


FRONT VIEW

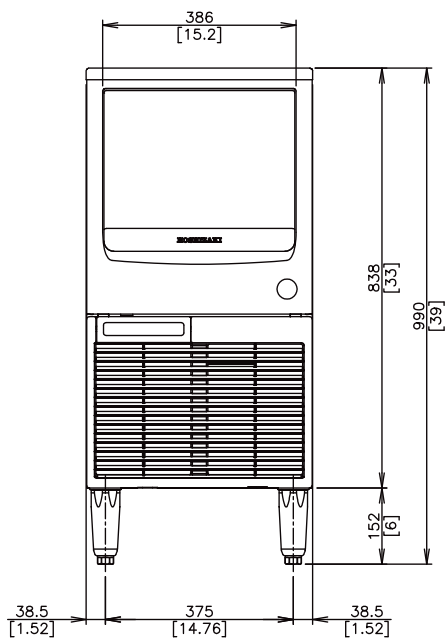

TOP VIEW

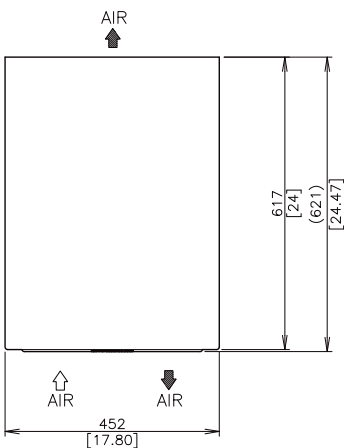

SIDE VIEW

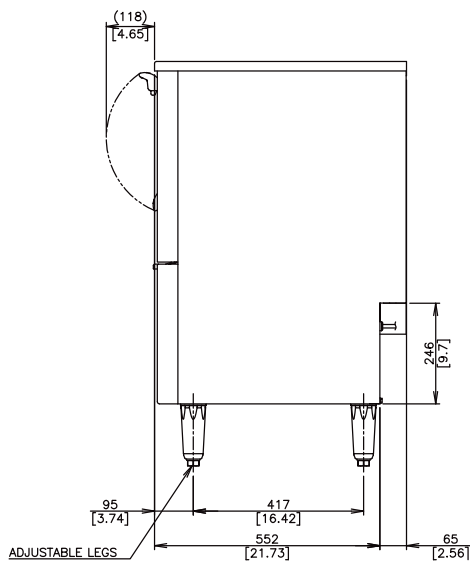

REAR VIEW

